


# MTP Series


## MTP SERIES PRINTERS

MTP Series thermal printers offer a wide range of features, making them ideal for applications where size, portability, low power consumption, battery operation and affordability are important factors. MTP Series printers provide the benefit of hardcopy printouts for verifying results or retaining records from an array of small or handheld portable instruments. Small in size and price, the MTP Series printers are widely used in applications such as calculators, measuring instruments, analyzers, medical devices, educational equipment and personal computer terminals.


- Compact, lightweight design
- High reliability
- Suitable for battery operation
- Designed for versatile applications
- Silent, non-impact system

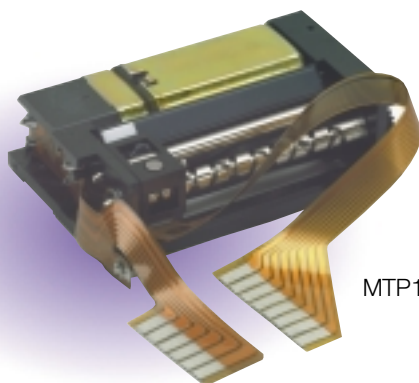

MTP102-16B

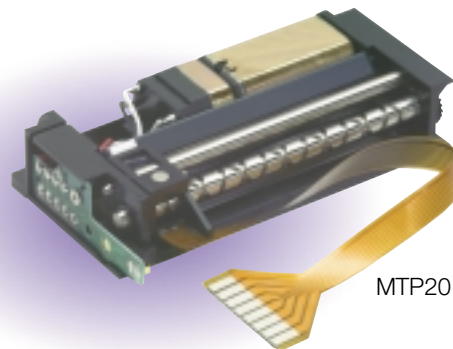

MTP201

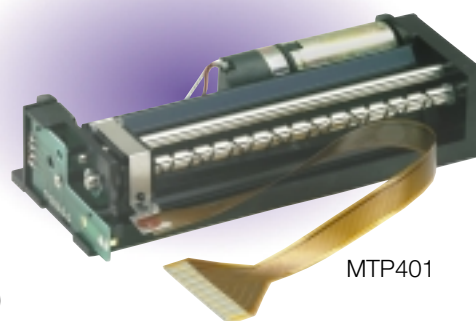

MTP401

<http://www.yjx.net.cn> QQ 905052812

Model	MTP102-16B	MTP201-20	MTP201-24	MTP401-40	MTP201G-128	MTP201G-166	MTP401G-280	
	Character type			Graphic type				
Dot composition	7 x 110	7 x 138	7 x 166	7 x 278	8 x 128	8 x 166	8 x 280	
Printing	Method							
	Thermal serial head system							
	Direction							
	Left to right							
	No. of characters/line	16	20	24	40	18	24	40
	Timing							
	Synchronized with Tach-Generator							
	Width (mm)	26.4	45.9	46	66.7	44.7	46	67.2
Paper feed pitch (mm)	3.8			2.8				
Speed (cl/s)	1.2	1.0	0.9	0.5	0.9		0.5	
Speed (cps)	19	20	22	20	16	22	20	
Detection	Home position							
Mechanical switching system								
Dimensions (WxDxH) mm	48 x 31 x 13.8	70 x 34 x 14.4		91 x 35.5 x 20	70 x 34 x 14.4		91.5 x 35.5 x 20	
Weight (g)	Approx. 35	40		50	40		50	
Power supply	Operating voltage							
	5 VDC ± 1.0							
Service life	Current consumption							
	3.2 A max. (printing) / 250 mA max. (feeding)							
MCTF	500,000 lines							
	Failure rate							
1 x 10E-6/line max								
Operating temperature (°C)								
0 to 50								
Storage environment (°C)								
-40 to 60								
Paper	Width (mm)	38 +0/-1	58 +0/-1	80 +0/-1	58 +0/-1	80 +0/-1		
	Path	Curve						
	Thickness (µm)	65 ± 5						

**IFM001-01B/01BM INTERFACE BOARD FOR MTP SERIES**

The IFM001-01B interface board prints data from a host system on all models in the MTP Series. It supports both 8-bit parallel and serial (TTL) input and is equipped with a wide variety of commands including double-width print, character spacing control and inverse print, and can print on a graphic printer. The IFM001-01BM interface board is also equipped with an EEPROM, allowing downloaded characters to be printed.



IFM001-01B

Model		IFM001-01B
Applicable mechanism		MTP Series Character & Graphic printers
CPU		HD6433238R43F (SMT) / HD6433238R42P (DIP)
Input control method		8-bit parallel (Centronics) STROBE, BUSY hand shaking Serial (TTL level) BUSY control, Xon/Xoff control
Character type		Alphanumeric, Katakana International, extended graphics
Dimensions (WxDxH) mm		71.5 x 59 x 11.5
Weight (g)		20
Operating voltage (Vcc)		5 VDC ± 0.5
Current consumption (Icc)	Standby	Max. 27 mA @ 5VDC
	Printing	Max. 30 mA @ 5VDC
Operating temperature (°C)		0 to 50
Storage temperature (°C)		-20 to 60

Model		HD6433238R43F	HD6433238R42P
Applicable mechanism		MTP Series Character & Graphic printers	
Package form		64-pin SMT	64-pin shrink DIP
Dimensions (WxDxH) mm		57.6 x 17.0 x 7.62	17.2 x 17.2 x 2.7
Configuration		C-MOS LSI	
Input method		8-bit parallel (Centronics), Asynchronous serial	
Operating voltage (Vcc)		5 VDC ± 0.5	
Operating frequency (MHz)		4.91 ± 0.5%	

深圳市福田区郁金香电子经营部

李科军-微型打印机网-郁金香 微打科技

SHENZHEN TULIP TECHNOLOGY CO.,LTD.

地址：深圳市福田区中航路都会100电子商城4楼4C113

RM.4C113, Duhui Electronic City Building, zhonghang Rd. Shenzhen China

电话TEL : +86 755 83662036

传真Fax: +86 755 22638877(24 hours)

<http://www.yjx.net.cn> QQ 905052812

E-mail: [yjx@yjx.net.cn](mailto:yjx@yjx.net.cn)

MSN: [sz\\_lkj@hotmail.com](mailto:sz_lkj@hotmail.com)



Seiko Instruments Inc.